



Welcome

to the

Paisley Feedermain Phase III


**(Ryde Road Pumping Station to
approximately 60m East of
Stephanie Drive)**

Virtual Open House

INTRODUCTION

The purpose of this open house is to

- ▶ Present the project overview
- ▶ Construction schedule
- ▶ Identify impacts
- ▶ Construction methods

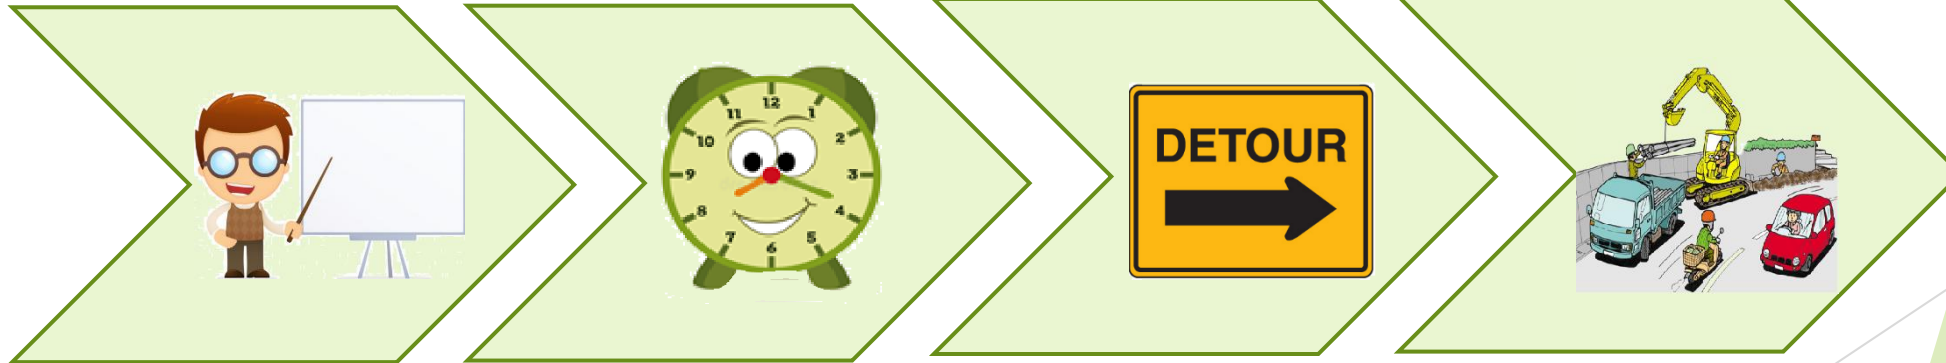


PROJECT OVERVIEW

- ▶ The Paisley Feedermain is needed to allow for future growth within the City of Guelph.
- ▶ This phase of the Paisley Feedermain construction consists of approximately 410 metres.
- ▶ It will be a 400mm diameter trunk Concrete Pressure Pipe watermain
- ▶ This phase includes construction on Paisley Road from Stephanie Drive to Ryde Road Pumping Station.
- ▶ A Feedermain is a watermain that delivers water directly to the Ryde Road Reservoir



CONSTRUCTION SCHEDULE

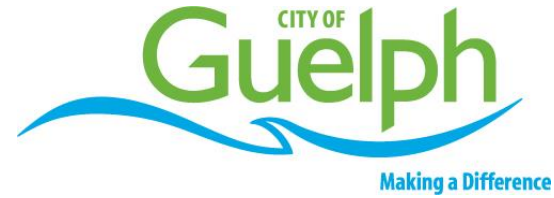

- ▶ The construction work will start in late August 2021.
- ▶ Construction is expected to be complete in December 2021.



PROJECT MAP



DISRUPTION TO PAISLEY ROAD

- ▶ The watermain will be installed by open cut method under the eastbound lanes of Paisley Road, starting from Stephanie Drive to Ryde Road.
- ▶ Paisley Road will be reduced to one lane of traffic each direction during construction and expect delays.
- ▶ Disturbed areas of Paisley Road will be repaired and repaved following construction
- ▶ Sidewalks, curbs and fencing will be removed to facilitate installation of the watermain and will be restored following construction



TEMPORARY CLOSURES

- ▶ Contractor will submit final Traffic Control Plan for City's approval
- ▶ Paisley Road and Stephanie Drive intersection will be closed for approximately 5 days
 - ▶ Detour through Candlewood Drive is recommended
- ▶ Paisley Road and Candlewood Drive intersection will be closed for approximately 5 days
 - ▶ Detour through Stephanie Drive is recommended
- ▶ Bus route 1018 will be permanently relocated to Paisley and Ryde Road




CONSTRUCTION METHODS

Open Cut Method:

- ▶ The project will be completed by open cut construction.



COMMENTS OR QUESTIONS

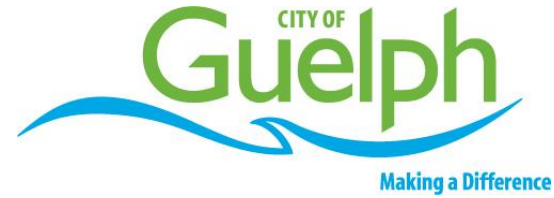

Mr. Ike Umar, C.E.T.
Project Manager
Engineering and Transportation
Services
City of Guelph
15 Wyndham St
Guelph, ON, N1H 4C6
Telephone: 519-822-1260
Extension 2242
Email ike.umar@guelph.ca



Mr. Duncaun McLeod, P.Eng.
Sr. Project Manager
Community Infrastructure
AECOM
50 Sportsworld Crossing Road,
Suite 290
Kitchener, ON, N2P 0A4
Telephone: 519-503-6634
Email duncaun.mcleod@aecom.com

Information about all Guelph's Construction Projects is at guelph.ca/construction

Thank you for attending!

Your comments are important!